

Energieeffizienzdaten ¹ 15F6K1G-36MA


Effizienzklasse

KEB IE 2

Arbeitspunkt	rel. Frequenz ²	rel. Strom ²	rel. Verluste ³	abs. Verluste ⁴
1	90 %	100 %	2,38 %	405 W
2	50 %	100 %	2,25 %	382 W
3	0 %	100 %	2,15 %	366 W
4	90 %	50 %	1,48 %	251 W
5	50 %	50 %	1,42 %	241 W
6	0 %	50 %	1,40 %	238 W
7	50 %	25 %	1,16 %	198 W
8	0 %	25 %	1,17 %	199 W
Standby	-	-	-	47,30 W



Relative Verluste in den Arbeitspunkten

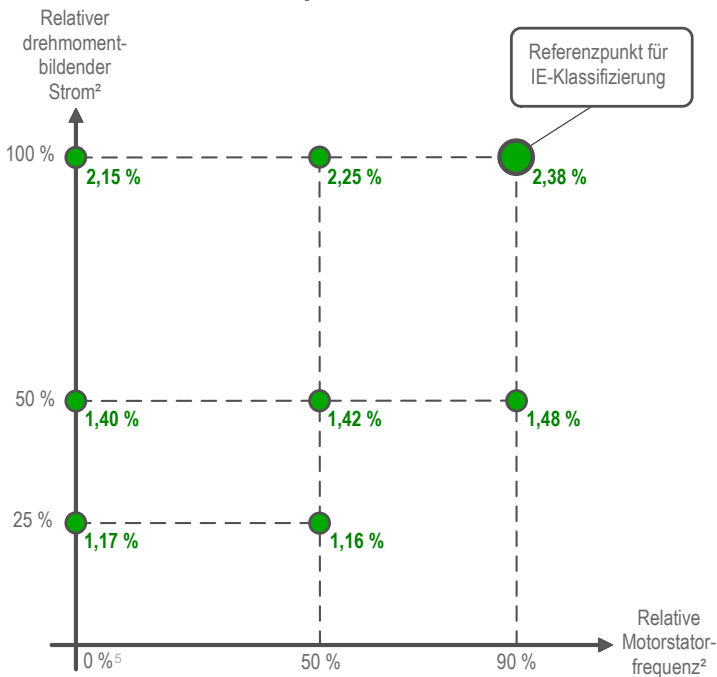

Gerätedaten

Materialnummer	15F6K1G-36MA
Produktserie	F6
Gehäusegröße	G
Gerätegröße	15
Eingangsbemessungsspannung	400V
Motorbemessungsleistung	11kW
Ausgangsbemessungsleistung	17kVA
Ausgangsbemessungsstrom	24A
Bemessungsschaltfrequenz	8kHz

- 1) Alle Verlustdaten gelten für eine Umgebungstemperatur von 45°C und beziehen sich auf den Betrieb bei Bemessungsschaltfrequenz und maximaler Kühlleistung. Die Daten sind für das Basisgerät mit Luftkühlkörper gültig. Alternative Kühlkörperkonzepte können die Verlustleistung beeinflussen.
- 2) Die Arbeitspunkte werden normativ vorgegeben und definieren sich durch den „drehmomentbildenden Strom“ und die „relative Motorstatorfrequenz“. Ziel der Verwendung dieser Parameter ist es, die Verluste von Frequenzumrichtern mit Motoren in vergleichbaren Betriebspunkten abzubilden.
- 3) Die relativen Verluste beziehen sich auf die Bemessungsscheinleistung des Frequenzumrichters und sind maßgebend für die normative Klassifizierung nach EN 61800-9-2.
- 4) Alle Verlustangaben sind lediglich derzeitige Prüfwerte, die der Veränderung unterliegen.
- 5) Nach EN 61800-9-2 ist es zulässig, die Verluste in den Punkten mit 0 % relativer Motorstatorfrequenz bei einer absoluten Frequenz von 5 Hz zu messen.

Energy efficiency data 1 15F6K1G-36MA


Efficiency class

KEB IE2

Load point	rel. frequency ²	rel. current ²	rel. losses ³	abs. losses ⁴
1	90 %	100 %	2,38 %	405 W
2	50 %	100 %	2,25 %	382 W
3	0 %	100 %	2,15 %	366 W
4	90 %	50 %	1,48 %	251 W
5	50 %	50 %	1,42 %	241 W
6	0 %	50 %	1,40 %	238 W
7	50 %	25 %	1,16 %	198 W
8	0 %	25 %	1,17 %	199 W
Standby	-	-	-	47,30 W



Relative power losses in load points

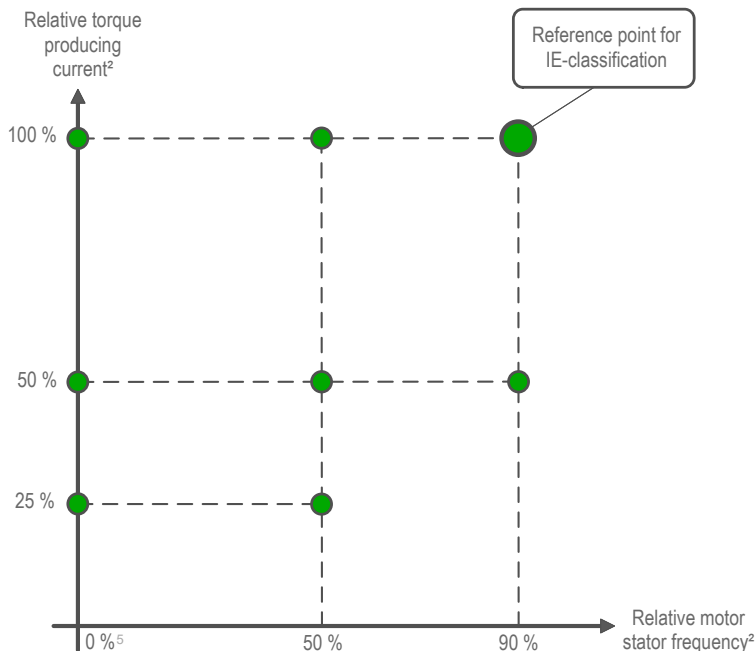

Device data

Material number	15F6K1G-36MA
Series	F6
Housing size	G
Inverter size	15
Rated input voltage	400V
Rated motor power	11kW
Rated apparent output power	17kVA
Rated output current	24A
Rated switching frequency	8kHz

1) All power loss data are valid for an ambient temperature of 45 °C and refer to the operation at rated switching frequency with maximum cooling capability. The data are applicable for the base device with air cooled heat sink. Alternative heat sink concepts may influence the power loss.

2) The load points are specified by EN 61800-9-2 and are defined through the "relative torque producing current" and the "relative motor stator frequency". The purpose of these parameters is to depict the power losses of drives with motors in comparable load points.

3) The relative power losses refer to the rated apparent output power of the inverter and are decisive for the normative classification according to EN 61800-9-2.

4) All power loss data are only current test values, that are subject to change.

5) In accordance to EN 61800-9-2, it is permissible to measure the power losses in load points with 0 % relative motor stator frequency at an absolute stator frequency of 5 Hz.